

## TOP OF POLE MOUNT



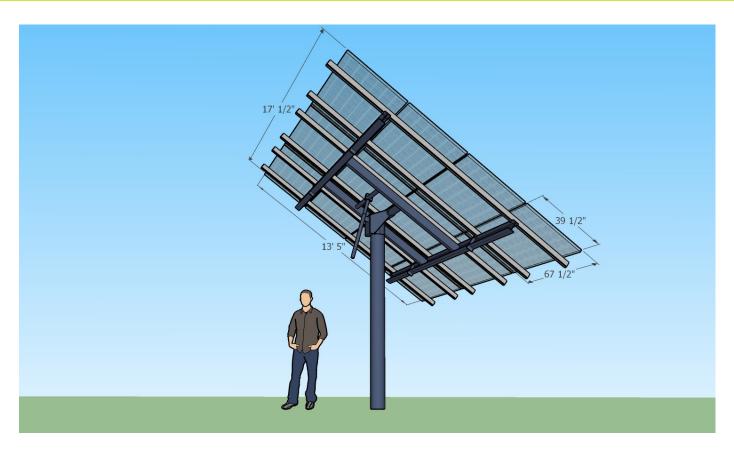

## Notes:

- 1. NPS and pipe thickness should be selected on our website calculator based on the conditions at the installation site. Schedule 40 and Schedule 80 thicknesses are most common.
- 2. Layouts that are 4 rows in landscape are considered standard and no notation is required in the name. Layouts that are 5 rows in landscape are noted with a "TALL" in the name. Mount configurations of 3 rows in landscape are available as custom builds.
- 3. Frame duty should be selected on our website calculator based on the conditions at the install site.
- 4. CUS: custom sizing can be applied to the mounting pipe, solar module, module layout, or frame duty to fit project needs.

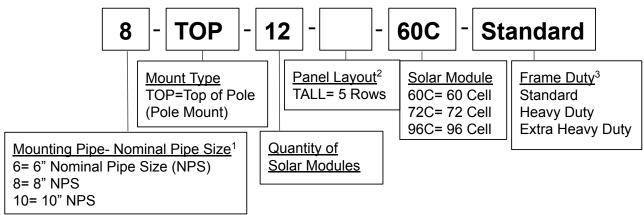